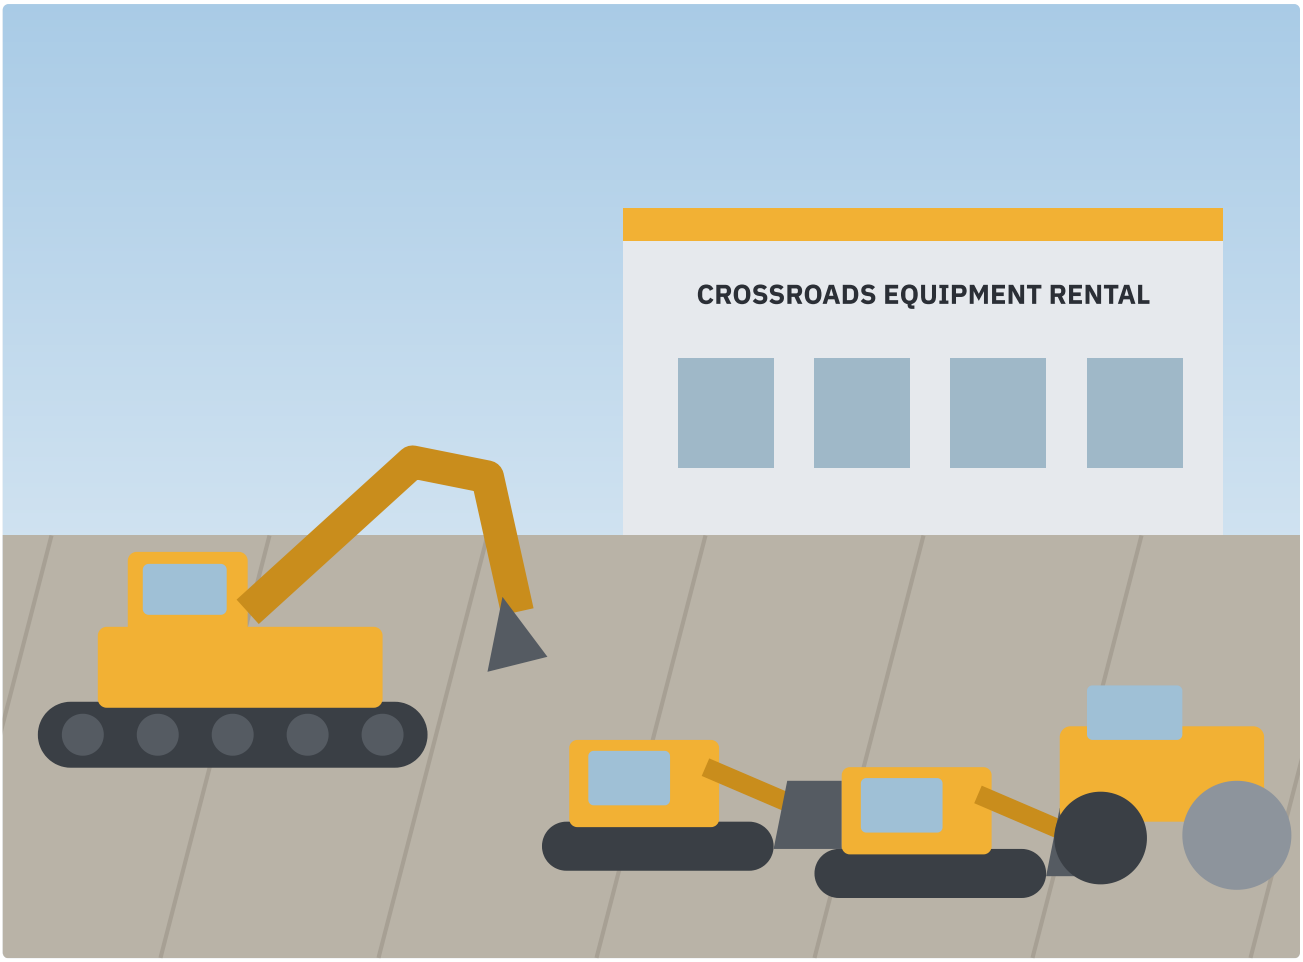


Equipment rental quote

Site-work equipment for the Fishers Medical Office, March to April 2027.

QUOTE # CR-Q-26-1893
ISSUED Nov 30, 2026
VALID UNTIL Jan 15, 2027

CREATED BY
Crossroads Equipment Rental
Brian Kowalski
+1 317 555 0124
brian@crossroadsrental.example

PREPARED FOR
Hoosier Site Development LLC
Tanya Brooks
+1 317 555 0169
tanya@hoosiersite.example

Quote

QUOTE # CR-Q-26-1893

ISSUED Nov 30, 2026

VALID UNTIL Jan 15, 2027

CREATED BY
Crossroads Equipment Rental
Brian Kowalski
+1 317 555 0124
brian@crossroadsrental.example
6100 W 56th St, Indianapolis, IN 46254

PREPARED FOR
Hoosier Site Development LLC
Tanya Brooks
+1 317 555 0169
tanya@hoosiersite.example
Fishers Medical Office, 11900 Olio Rd, Fishers, IN 46037

Our fleet

Crossroads rents 640 machines from two yards in Indianapolis and Lafayette, from mini excavators to 40-ton earthmovers. Every machine is serviced between rentals and goes out with a fresh inspection report.

Our own drivers deliver within 60 miles, and a field technician is on call for breakdowns six days a week.



Made with ExtraflowDoc

extraflowdoc.com

Project information

From your bid package and our site visit with Tanya on November 23, 2026.

JOB

Fishers Medical Office

Site work for a two-story clinic

LOCATION

11900 Olio Rd, Fishers

Gate on the west side

WORK

Pad, utilities, paving base

4.2 acres

ON RENT

Mar 1 to Apr 7, 2027

Five machines, staggered

HOURS

7 am to 5 pm

Monday to Friday

CONTACT ON SITE

Tanya Brooks

+1 317 555 0169

Site conditions

	WHAT WE FOUND	WHAT IT MEANS
Access	Gravel haul road from the west gate	Lowboy can reach the staging area
Ground	Clay, soft in the north-east after rain	Track machines only off the haul road
Overhead	Power line along the north side, 14 ft	Telehandler works south of the line
Fuel	No fuel on site	We can add weekly fuel delivery
Security	Fenced, locked gate at night	Keys left in the job box

Prices assume the machines are available on the dates shown; we confirm availability when the quote is accepted.

Made with ExtraflowDoc

extraflowdoc.com

Rate card

Every machine has a daily, weekly and monthly rate. Each line in this quote uses the one that costs you least for its period.

MACHINE	DAY	WEEK	MONTH	BILLED AS
Crawler excavator, 24 t	$1,450	$5,200	$14,600	3 weeks
Compact track loader	$620	$3,400	$9,900	Week, pro-rated
Vibratory roller, 84 in	$780	$3,500	$9,800	1 month
Telehandler, 10,000 lb	$520	$2,300	$6,400	8 days
Hydraulic breaker	$420	$1,450	$3,900	1 week

A week is 7 calendar days and a month 28. Machines billed by the day are charged for weekdays on rent only.

How periods are billed

From the dates

Each line prints its start and end date, so you pay for the days on rent.

Pro-rated weeks

Past 4 weeks, the loaders bill by the day at the weekly rate ÷ 7.

Off-rent early

Call before 10 am and the machine is off rent the same day.

Made with ExtraflowDoc

extraflowdoc.com

Equipment and rates

Each machine with its rate, rental period and dates. Attachments that come with a machine are listed under it.

#	ITEM	QTY	PRICE	DISC.	TAX	TOTAL
	Machines					
1	**Crawler excavator, 24 t** Code: EX-24 Rate: Weekly Rental: Mar 1 – Mar 21, 2027 • 36 in dig bucket, included • Hydraulic thumb, included • Hydraulic quick coupler, included 	3 weeks	$5,200.00	–	7%	$16,692.00
2	**Compact track loaders, 2 machines** Code: CTL-75 Rate: $3,400.00 a week, pro-rated by the day Rental: Mar 1 – Mar 29, 2027, 29 days each Discount: 10% for 2 machines over 4 weeks 	58 machine-days	$485.71	10%	7%	$27,128.84
3	**Smooth-drum vibratory roller, 84 in** Code: RL-84 Rate: Monthly Rental: Mar 8 – Apr 7, 2027 	1 month	$9,800.00	–	7%	$10,486.00
4	**Telehandler, 10,000 lb, 55 ft** Code: TH-10K Rate: Daily, weekdays only Rental: Mar 22 – Mar 31, 2027 	8 days	$520.00	–	7%	$4,451.20
					Subtotal: Machines	**$58,758.04**

Made with ExtraflowDoc

extraflowdoc.com

#	ITEM	QTY	PRICE	DISC.	TAX	TOTAL
	Attachments					
5	**Hydraulic breaker for the excavator, 2,000 ft-lb** Code: AT-BRK Rental: Mar 8 – Mar 14, 2027 	1 week	$1,450.00	–	7%	$1,551.50
6	**Pallet forks for one track loader** Code: AT-FORK	29 days	$35.00	–	7%	$1,086.05
				Subtotal: Attachments		**$2,637.55**
	Delivery and protection					
7	**Delivery and pickup by lowboy, round trip** Code: DL-LOW Excavator; both track loaders together; roller; telehandler.	4 trips	$650.00	–	7%	$2,782.00
8	**Rental protection plan, per machine** Code: DL-RPP Covers accidental damage above a $1,000 deductible per event.	5 machines	$295.00	–	7%	$1,578.25
				Subtotal: Delivery and protection		**$4,360.25**

Subtotal before discounts	$64,271.18
Multi-machine discount	-$2,817.12
Subtotal (without taxes)	$61,454.06
Indiana sales tax (7%)	$4,301.78
Total	**$65,755.84**

Not included

- ☐ Fuel: machines go out full and are refueled at $4.95 a gallon if returned below full
- ☐ Operators: machines are rented bare, without an operator
- ☐ Cleaning: a $150 fee if a machine comes back caked in mud

Made with ExtraflowDoc

extraflowdoc.com

Equipment spec sheets



Crawler excavator, 24 t

Digs the footings and the storm line, and loads trucks from the pad.

POWER	
Engine	174 hp, Tier 4 Final
SIZE	
Operating weight	52,900 lb
Transport width	10 ft 6 in
Dig depth	22 ft 8 in
VISIBILITY	
Cameras	Rear and right side



Compact track loader

Spreads and grades the base stone, and moves material with forks.

POWER	
Engine	74 hp, Tier 4 Final
SIZE	
Operating weight	10,400 lb
Width	6 ft 6 in
Rated capacity	2,800 lb
VISIBILITY	
Cab	Enclosed, 360° glass

Made with ExtraflowDoc

extraflowdoc.com

Equipment spec sheets, continued



Vibratory roller, 84 in

Compacts the building pad and the paving base in lifts.

POWER	
Engine	157 hp
SIZE	
Operating weight	25,300 lb
Drum width	84 in
Centrifugal force	60,000 lb
VISIBILITY	
Display	Compaction meter



Telehandler, 10,000 lb


Sets the utility structures and unloads pipe at the staging area.

POWER	
Engine	100 hp
SIZE	
Lift capacity	10,000 lb
Lift height	55 ft
Width	8 ft 1 in
VISIBILITY	
Camera	Rear, with load chart display

Made with ExtraflowDoc

extraflowdoc.com

Delivery and staging

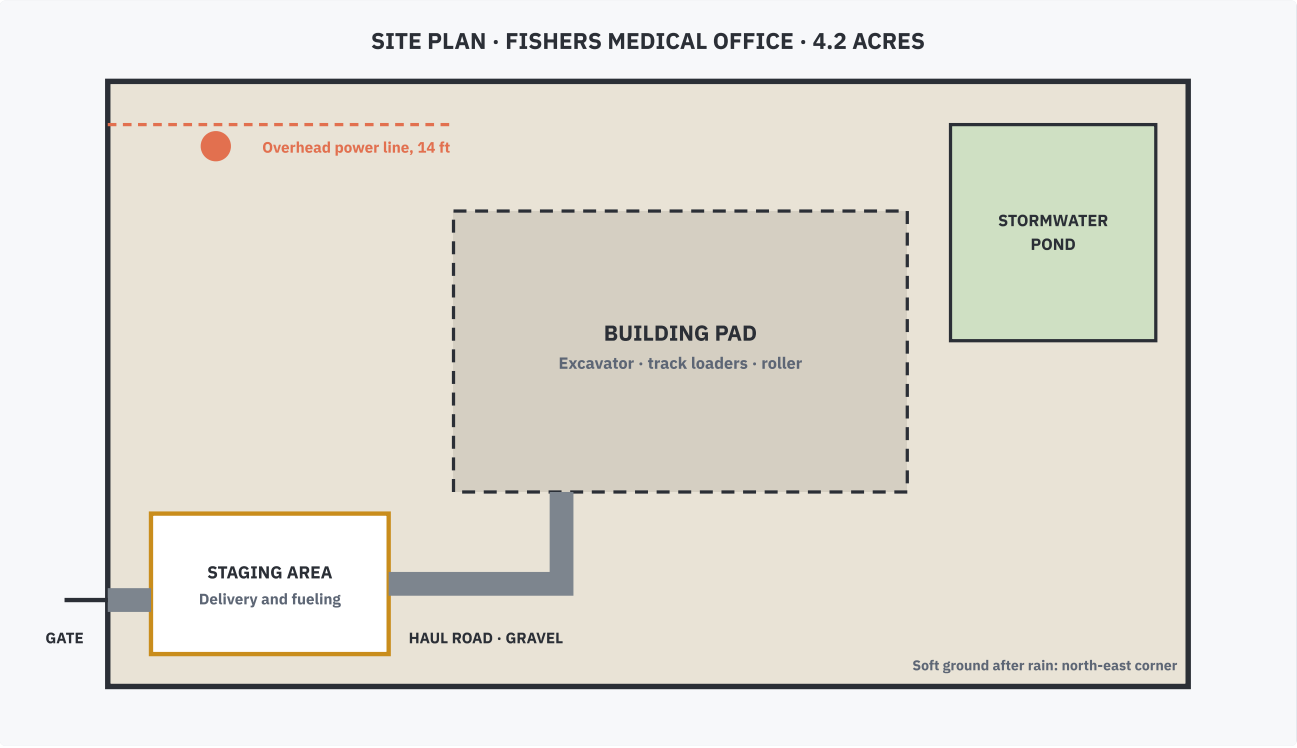

Machines are delivered to the staging area by the west gate and picked up from the same spot. The telehandler works south of the power line only.

Delivery schedule

Deliveries by 7 am on the day the machine goes on rent.

MAR 1

Excavator, 2 loaders

Two lowboy trips by 7 am.

MAR 8

Roller and breaker

Breaker off rent Mar 14.

MAR 22

Telehandler

Excavator picked up Mar 22.

MAR 29

Loaders off rent

Picked up Mar 30.

APR 7

Roller off rent

Last pickup.

Made with ExtraflowDoc

extraflowdoc.com

Special rental terms

1. Mobilization and access

1.1 The haul road and staging area must be passable for a 75 ft lowboy. A wasted trip because the site is closed or blocked is charged at $650.

2. Off-rent notice

2.1 Call or email before 10 am to put a machine off rent that day. Rent ends when you call, not when we pick up.

3. Ground conditions

3.1 Machines that get stuck in soft ground are recovered at cost. Keep wheeled machines on the haul road after rain.

4. Consumables

4.1 Breaker points and bucket teeth worn by normal use are included. Broken teeth or points are charged at cost.

5. Optional attachments

5.1 More attachments can be added to a machine on rent at the rate card prices, delivered with the next scheduled trip at no travel fee.

6. Travel fees

6.1 A field service call outside 60 miles of Indianapolis is charged at $2.50 a mile. Fishers is within the free zone.

7. Insurance

7.1 The protection plan covers damage above the deductible. You keep general liability insurance and name Crossroads as additional insured.

8. Validity

8.1 This quote is valid until Jan 15, 2027, subject to availability on the dates shown.

Accept the quote

Sign electronically to reserve the machines for your dates. We send the rental contracts before the first delivery.

Crossroads Equipment Rental

SIGNER · YOU

Brian Kowalski

Rental Account Manager

Signing link sent to **brian@crossroadsrental.example**

Signature

Date MM / DD / YYYY

Hoosier Site Development LLC

SIGNER · CLIENT

Tanya Brooks

Project Superintendent

Signing link sent to **tanya@hoosiersite.example**

Signature

Date MM / DD / YYYY

Signed electronically with ExtraflowDoc · Document ID CR-Q-26-1893 · Audit trail in the attached certificate of completion

Made with ExtraflowDoc

extraflowdoc.com

CROSS ROADS
EQUIPMENT RENTAL

Thank you for choosing Crossroads

Questions about this quote or a machine on rent? Call Brian, or our field service line any day but Sunday.

YOUR CONTACT

Brian Kowalski

Rental Account Manager

+1 317 555 0124

brian@crossroadsrental.example

OFFICE

Crossroads Equipment Rental
6100 W 56th St
Indianapolis, IN 46254

ONLINE

crossroadsrental.example

QR code

Made with ExtraflowDoc

extraflowdoc.com